


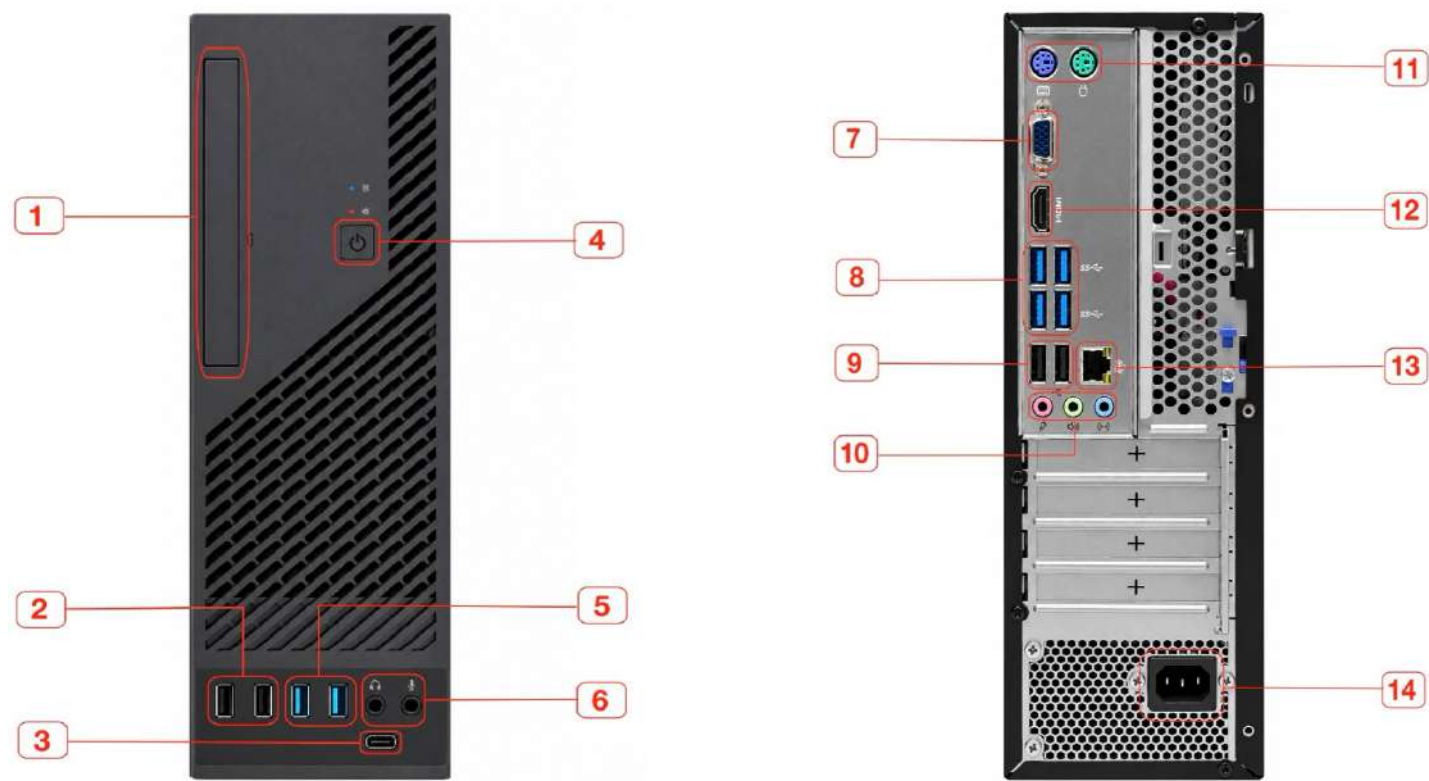

01. Optical Drive*	08. 4x USB 3.2 Gen 1
02. 2x USB 2.0	09. 2x USB 2.0
03. Type-C*	10. Microphone, Headphone & Audio Input
04. Power on button	11. PS/2
05. 2x USB 3.0	12. 1x HDMI
06. Headphone and microphone	13. 1x RJ45
07. 1x VGA	14. Power socket

PERFORMANCE

Processor

Processor Family

AMD Ryzen 5000 series

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
AMD Ryzen™ 7 PRO 5750G	8	16	3.8 GHz	4.6 GHz	20 MB L3	AMD Radeon™ Graphics
AMD Ryzen™ 5 PRO 5650G	6	12	3.9 GHz	4.4 GHz	19 MB L3	AMD Radeon™ Graphics
AMD Ryzen™ 3 PRO 5350G	4	8	4.0 GHz	4.2 GHz	10 MB L3	AMD Radeon™ Graphics
AMD Ryzen™ 7 5700G	8	16	3.8 GHz	4.6 GHz	16 MB L3	AMD Radeon™ Graphics
AMD Ryzen™ 5 5600G	6	12	3.9 GHz	4.4 GHz	16 MB L3	AMD Radeon™ Graphics
AMD Ryzen™ 3 5300G	4	8	4.0 GHz	4.2 GHz	8 MB L3	AMD Radeon™ Graphics

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 IoT Enterprise LTSC 2024
- Windows® 11 DG Windows® 10 Pro 64
- Ubuntu Linux
- No preload operating system

Graphics

Graphics**

Graphics	Type	Memory	Max Resolution	Connector
AMD Radeon™ Graphics	Integrated	Shared	4096 × 2160 @ 60 Hz (HDMI); 1920 × 1080 @ 60 Hz (VGA)	1× HDMI 2.1, 1× VGA
AMD Radeon™ R7 430 Graphics	Discrete	2 GB GDDR5	4096 x 2160 pixels (4K) at 60 Hz	2x DisplayPort and 1x VGA output ports
AMD Radeon™ 520 Graphics	Discrete	1 GB GDDR5	41920 x 1080 (Full HD)	two DisplayPort (DP) ports TMDS
AMD Radeon™ RX 550X Graphics	Discrete	4 GB GDDR5	5120 x 2880 at 60 Hz via DisplayPort 4096 x 2160 (4K)	DVI port and one or more HDMI and/or DisplayPort outputs

Monitor Support

Monitor Support

Supports up to 2 independent displays via onboard ports (1x HDMI® and 1x VGA)

Chipset

Chipset

AMD® A520 Chipset

Memory

Max Memory^[1]

Up to 64GB DDR4

Memory Slots

Two DDR4 UDIMM slots, dual-channel capable

Fusion Station W400s

Memory Type

- DDR4-2666MHz
- DDR4-3200MHz

Storage

Storage Support

- Up to three drives, 1x 3.5" HDD + 1x 2.5" HDD + 1x M.2 SSD
- 3.5" HDD up to 2TB
- 2.5" HDD bay is only for customer self-upgrade
- M.2 SSD up to 2TB each

Removable Storage

Optical**

- OPTIONAL DVD-ROM, SATA connector, slim (9.0mm)
- OPTIONAL DVD burner (DVD±RW), SATA 1.5Gb/s, slim (9.0mm)
- None

Multi-Media

Audio Chip

High Definition (HD) Audio

Speakers

Single speaker, 2W x1

Power Supply

Power Supply**

Power	Type	Efficiency	Key Features
180W	Fixed	85%	100-240V, 50-60Hz
260W	Fixed	90%	100-240V, 50-60Hz
310W	Fixed	92%	100-240V, 50-60Hz
380W	Fixed	92%	100-240V, 50-60Hz

DESIGN

Input Device

Keyboard**

- Calliope Keyboard (USB connector), black
- Traditional Keyboard (USB connector), black
- Wireless Keyboard, black
- No keyboard

Mouse**

- Wireless Mouse, black
- Mouse (USB connector), black
- No mouse

Mechanical

Form Factor

Small Form Factor (SFF) (8.6L)

Bay

- 1x 3.5" disk bay
- 1x 2.5" disk bay (optional)
- 1x slim ODD bay

Expansion Slots

- One PCIe® 3.0 x16, full-height, length ≤ 222.7mm, height ≤ 111.2mm
- One PCIe® 3.0 x1, full-height, (length ≤ 185mm, height ≤ 100mm) or (length ≤ 118mm, height ≤ 110mm)
- One M.2 slots for SSD

CONNECTIVITY

Network

WLAN + Bluetooth**

- Realtek® Wi-Fi® 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card
- Intel® Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.2, M.2 Card
- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, Intel® vPro® technology support, M.2 Card
- No WLAN and Bluetooth®

Onboard Ethernet

Gigabit Ethernet, Intel® Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN

Optional Ethernet

- 2.5 Gigabit Ethernet, Realtek® RTL8125BGS, 1x RJ-45, PCIe® x1
- No optional Ethernet

Ports

Front Ports

- 1x USB-C (USB 5Gbps / USB 3.2 Gen 1) (Optional)
- 1x USB-A USB 3.0
- 1X USB-A 2.0
- 1x headphone & microphone jack (3.5mm)

Rear Ports

- 4x USB-A 3.2 gen 1
- 2x USB-A 2.0
- 1x HDMI
- 1X VGA
- 1x Ethernet (RJ-45)
- 2x PS/2

Optional Rear Ports***

- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1), via 2-port USB expansion card, PCIe® x1
- 1x parallel
- 1x serial
- 1x 2nd serial
- 4x serial (via 4-port serial expansion card, PCIe® x1)

SERVICE

Warranty

Base Warranty**

- 1-year courier or carry-in service
- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%